



NATIONAL SEEDS CORPORATION LIMITED

(A Govt. of India Undertaking)

CENTRAL STATE FARM :- SURATGARH (Raj.)


G.SCHEDULE FOR CONSTRUCTION FOR LINING OF WATER COURSE FOR 1.75 KM LENGTH : AT BLOCK NO II					
SR. NO.	ITEM OF WORK	QTY.	UNIT	RATE	AMOUNT
1	Surface dressing of the ground including removing vegetation and inequalities not exceeding 15cm deep and disposal of rubbish lead up to 50mtr and lift upto 1.5mtr. Ref. 2.28 (DSR-2016)	4375.00	SQM	13.95	61031.25
2	Earth work excavation in foundation trenches or drains not exceeding 1.5 Mtr. in width or 10 SQM. On plan including dressing of side & ramming of bottoms, lift upto 1.5 Mtr. Including getting out the excavated soil & disposal of surplus excavated soil as directed within a lead of 50Mtr. Ref. 2.8.1 (DSR-2016)	4812.50	CUM	166.4	800800.00
3	Preparing surface levelled dressed to proper slope and laying over it on tibia sand properly rammed and watered in two layes of 5 cm each. P&L 250 micron film as per IS 2506-1984 including overlapping on finished surface of compacted tibia sand. Over LDPF film 15mm thick cement sand mortar in 1:3 shall be provided and laid which shall be cured properly. Over the base mortar single layer 1st class brick (class 75) lining in cement bajri mortar 1:3 shall be provided with joints not more tahn 8mm and curing done for 14 days.This also includes providing weedicide & anti termite treatment as per specifications.(Item of PHED BSR 2015)	3041.02	SQM	386.1	1174137.82
4	Brick work with bricks of class designation 75 in Foundation and plinth in cement mortar 1:6 (1Cement : 6 Course Sand) Ref. 6.1.2 (DSR-2016)	536.88	CUM	4395.40	2359802.35
5	20 MM Cement plaster on new surface on walls in cement sand mortar of Mix : 1:6 (1Cement : 6 Course Sand) including racking of joint etc complete Ref. 13.6.2 (DSR-2016)	1710.42	SQM	200.93	343674.69
6	12 MM Cement plaster on new surface on walls in cement sand mortar of Mix : 1:6 (1Cement : 6 Course Sand) including racking of joint etc complete Ref. 13.4.2 (DSR-2016)	6106.20	SQM	147.73	902068.93
7	Providing and laying 300 mm non-pressure NP2 class (light duty) R.C.C. pipes with collars jointed with stiff mixture of cement mortar in the proportion of 1:2 (1 cement : 2 fine sand) including testing of joints etc. complete. Ref. 19.6.4 (DSR-2016)	20.00	M	515.13	10302.60
8	Structural steel work in single section, fixed with or without connecting plate, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete.. Ref. 10.1 (DSR-2016)	150.00	kg	58.45	8767.50
9	Filling With avialable earth (excluding rock) in trenches or in plinth sides of foundations etc in layers not exceeding 20cm in depth consolidating each layer by ramming watering lead upto 50m and lift upto 1.5m. Ref. 2.25 (DSR-2016)	2100.00	CUM	125.75	264075.00
TOTAL					5924660.14



NATIONAL SEEDS CORPORATION LIMITED

A Govt. of India Undertaking

CENTRAL STATE FARMS - SURATGARH

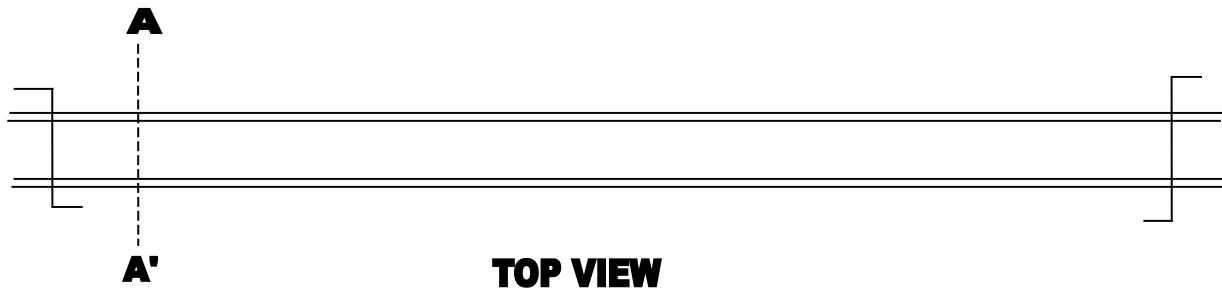

CONSTRUCTION FOR LINING OF WATER COURSE FOR 2.50 KM LENGTH AT BLOCK NO II

